

IMPORTANT:

IF NECESSARY, ADJUST THREADED COLLARS TO ENSURE:


- STAPLE HEIGHT DOES NOT EXCEED 40MM ABOVE DECK.
- DECK PLATE SITS PERPENDICULAR TO STAPLE AXES.

DO NOT OVERTIGHTEN NUTS, MAX TORQUE = 30Nm

APPLY SEALANT/Jointing COMPOUND BETWEEN THREADED COLLAR, DECK PLATE AND AND STAPLE.

SAFE WORKING LOADS:

0° FROM VERTICAL, SWL = 7600KG
 45° FROM VERTICAL, SWL = 5250KG
 90° FROM VERTICAL, SWL = 5250KG
TO ACHIEVE MAX SWL, LOAD MUST BE APPLIED IN PLANE WITH CENTRELINES OF BOTH THREADS

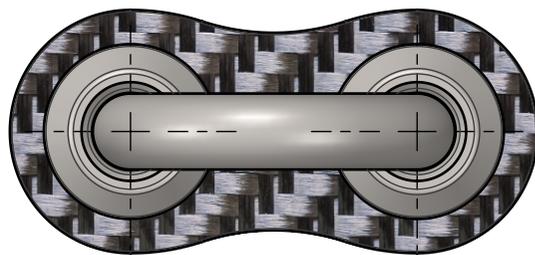

DRILL 2 X 15.0MM HOLES ON 38.0 CENTRES

spinlock

PD/10C(2D)_MAY13

ALL DIMENSIONS IN MM		LINE SIZE	N/A
SCALE	1:1	FASTENERS	2 x M10
PAGE SIZE	(297 x 210)	MAX LOAD	7600KG
	A4		